

### **Electrical Specifications**


Frequency Band	758-960 MHz
Input Power (Max.)	10W as splitter, 5W as combiner
Insertion Loss (Max. / Typ.)	3.5 / 3.15 dB
VSWR (Max.)	1.5:1
Impedance (Nom.)	50 Ω
RF Connectors	N Female

### **Mechanical Specifications**

Finish	Yellow Chem Film
Overall Size (HxWxD)	1.5" x 4.75" x 4.5"
	(38 x 121 x 114 mm)
Net Weight	0.6 lbs (0.3 kg)
Ship Weight	1 lbs (0.5 kg)

## **Environmental Specifications**

Operating Temp. Range -20 to +50
----------------------------------

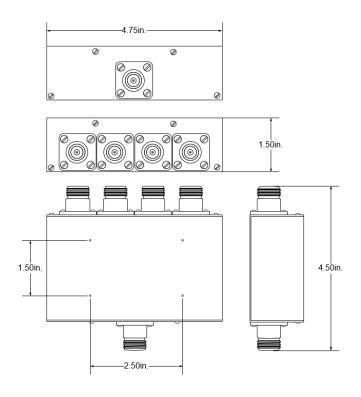

# Power Combiner/Splitter



EMR Power Splitters/Combiners offer frequency ranges from 30 MHz to 960 MHz with low insertion loss and excellent VSWR. Other features include high isolation, excellent amplitude and phase balance, and rugged packaging. All EMR power dividers are backed by 5-Year Warranty.

## **Product Features**

- Wideband
- · High isolation
- Low loss

All product specifications subject to change without notice.