

TRANSMITTER COMBINERS


UHF 806 - 894 MHz

ELECTRICAL SPECIFICATIONS

Model Number	W66572/7C	W66572-6/7C	W66582/7C	W66582-6/7C
Frequency Band (MHz)	806-894	806-894	806-894	806-894
# of Channels	7	7	8	8
Max. Pwr Per Channel	115 W	125 W	100 W	125 W
Min. Frequency Spacing	500 KHz	500 KHz	500 KHz	500 KHz
Max. Insertion Loss	3.4 dB	3.4 dB	3.6 dB	3.6 dB
Min. Insertion Loss	2.5 dB	2.5 dB	2.7 dB	2.7 dB
Isolation Tx/Tx (min/typ)	70 / 80 dB	70 / 80 dB	70 / 80 dB	70 / 80 dB
Isolation Ant/Tx (min/typ)	60 / 70 dB	60 / 70 dB	60 / 70 dB	60 / 70 dB
Impedance	50 Ω	50 Ω	50 Ω	50 Ω
Max. VSWR In/Out	1.1:1 / 1.25:1	1.1:1 / 1.25:1	1.1:1 / 1.25:1	1.1:1 / 1.25:1
Isolator	Dual	Dual	Dual	Dual
Temperature Range	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C	- 22 to +140 °F - 30 to +60 ° C

MECHANICAL SPECIFICATIONS

Cavity Dim (WxD)	Inches	7" x 7"	7" x 7"	7" x 7"	7" x 7"
	Metric	178 x 178	178 x 178	178 x 178	178 x 178
Finished Dim (HxWxD) (Max.)	Inches	29 3/4 x 19 x 12 1/2	29 3/4 x 19 x 12 1/2	29 3/4 x 19 x 12 1/2	29 3/4 x 19 x 12 1/2
	Metric	756 x 483 x 318	756 x 483 x 318	756 x 483 x 318	756 x 483 x 318
Connectors		N Female	N Female	N Female	N Female
Finish		EMR Gray	EMR Gray	EMR Gray	EMR Gray
Ship Weight: lbs.		116	116	135	135
kg.		52.7	52.7	61.3	61.3

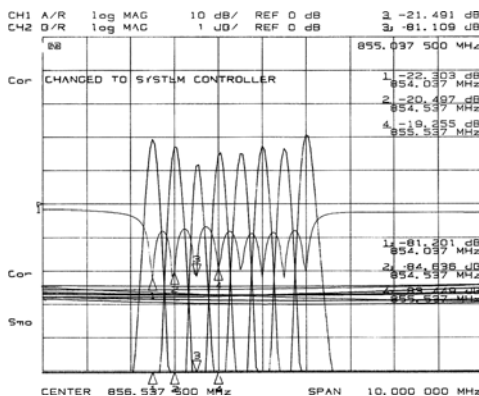

FILTER FERRITE