


## ADDITIONAL ACCESSORIES

### ELECTRICAL SPECIFICATIONS

Model Number	2512-0/B	2514-0/B	2522-0/BH	2524-0/BH	2532-0/BHF	2534-0/BHF
Frequency Band (MHz)	400-512	400-512	400-512	400-512	400-512	400-512
Input Power: Combiner	5.0 W	5.0 W	15.0 W	15.0 W	30.0 W	30.0 W
Splitter	10.0 W	10.0 W	30.0 W	30.0 W	60.0 W	60.0 W
Type	2-Way	4-Way	2-Way	4-Way	2-Way	4-Way
Isolation	20 dB min.	20 dB min.	20 dB min.	20 dB min.	20 dB min.	20 dB min.

### MECHANICAL SPECIFICATIONS

Dimensions: Inches	3 1/2 x 3 x 1 1/2	4 3/4 x 4 1/2 x 1 1/2	3 1/2 x 3 x 1 1/2	4 3/4 x 4 1/2 x 1 1/2	3 1/2 x 3 x 1 1/2	4 3/4 x 4 1/2 x 1 1/2
Metric	89 x 77 x 39	121 x 115 x 39	89 x 77 x 39	121 x 115 x 39	89 x 77 x 39	121 x 115 x 39
Connectors: Input	N Female	N Female	N Female	N Female	N Female	N Female
Output	N Female	N Female	N Female	N Female	N Female	N Female
Ship Weight: lbs.	2	3	2	3	2	3
kg.	1	1.4	1	1.4	1	1.4

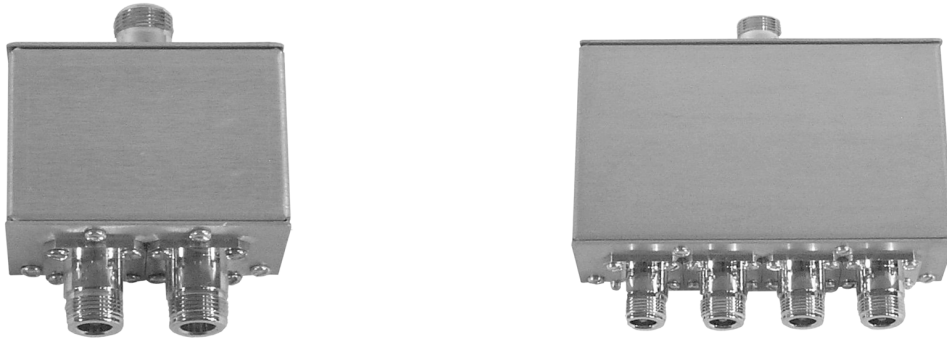

### ELECTRICAL SPECIFICATIONS

Model Number	2612-0/C	2614-0/C	2622-0/CH	2624-0/CH	2632-0/CHF	2634-0/CHF
Frequency Band (MHz)	806-960	806-960	806-960	806-960	806-960	806-960
Input Power: Combiner	5.0 W	5.0 W	15.0 W	15.0 W	30.0 W	30.0 W
Splitter	10.0 W	10.0 W	30.0 W	30.0 W	60.0 W	60.0 W
Type	2-Way	4-Way	2-Way	4-Way	2-Way	4-Way
Isolation	20 dB min.	20 dB min.	20 dB min.	20 dB min.	20 dB min.	20 dB min.

### MECHANICAL SPECIFICATIONS

Dimensions: Inches	3 1/2 x 3 x 1 1/2	4 3/4 x 4 1/2 x 1 1/2	3 1/2 x 3 x 1 1/2	4 3/4 x 4 1/2 x 1 1/2	3 1/2 x 3 x 1 1/2	4 3/4 x 4 1/2 x 1 1/2
Metric	89 x 77 x 39	121 x 115 x 39	89 x 77 x 39	121 x 115 x 39	89 x 77 x 39	121 x 115 x 39
Connectors: Input	N Female	N Female	N Female	N Female	N Female	N Female
Output	N Female	N Female	N Female	N Female	N Female	N Female
Ship Weight: lbs.	2	3	2	3	2	3
kg.	1	1.4	1	1.4	1	1.4